



## QUICK SPECS

Cartridges: 5" or 10"

Bars: 48" or 60"

Belt Widths: 24" - 72"



# SEALING SYSTEM



Prevents Material Spillage in Load Zones

- System is designed to **maintain a tight seal** between conveyor belt and hopper skirting. ■
- Eliminates belt sagging**, which commonly forms between idler rolls in conveyor load zones. ■
- Sealing cartridges **retrofit to existing idler frames** for fast installation. ■
- Available in single cartridge (5" width), double cartridge (10" width) or sealing bars. ■

# SPECIFICATIONS

FULL SEALING SYSTEM					REPLACEMENT CARTRIDGES			
Roll Diameter (inch)	Steel Roll Center Roll		Impact Cushion Center Roll		Double Cartridges		Seal Bar	
	Double Cartridge	Slide Bars	Double Cartridge	Slide Bars	5"	6"	48"	60"
C-5"	C5S-20E-(24-72)-410	C5S-20E-(24-72)-448	C5S-20EI-(24-72)-410	C5S-20EI-(24-72)-448	D5S-(24-72)-2	D6S-(24-72)-2	38-000026	38-000027
C-6"	C6S-20E-(24-72)-410	C6S-20E-(24-72)-448	C6S-20EI-(24-72)-410	C6S-20EI-(24-72)-448				
D-5"	D5S-20E-(24-72)-410	D5S-20E-(24-72)-448	D5S-20EI-(24-72)-410	D5S-20EI-(24-72)-448				
D-6"	D6S-20E-(24-72)-410	D6S-20E-(24-72)-448	D6S-20EI-(24-72)-410	D6S-20EI-(24-72)-448				

## HOW IT WORKS

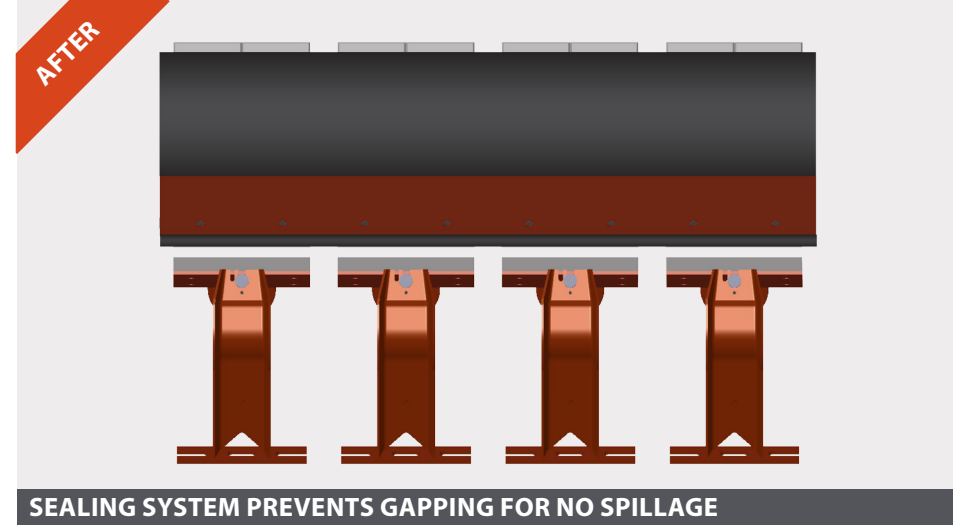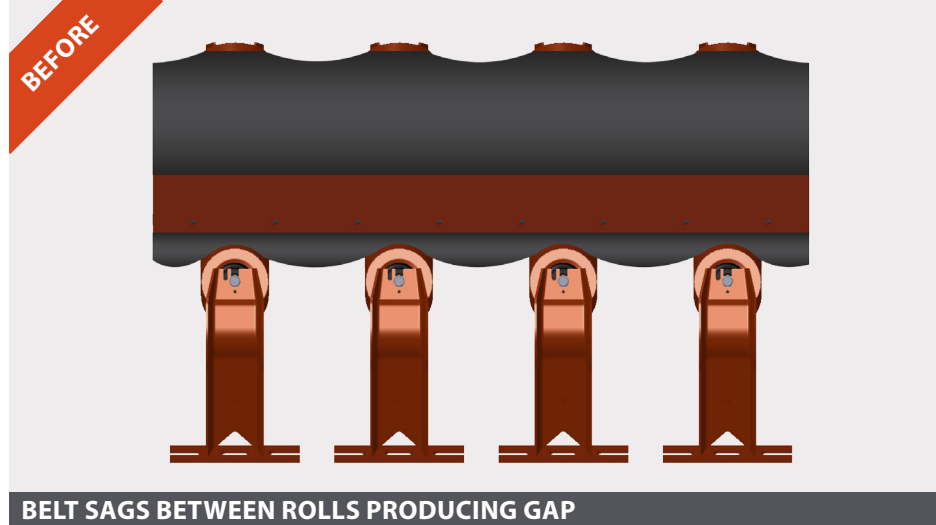

## OPTIONS

