



# JAW CRUSHERS

10"x24" - 36"x48"

- Fabricated and stress relieved body and pitman.
- Precision machined parts.
- Easy crusher setting changes.
- Multiple style dies to suit your crushing needs.


## CLEMRO

© 04.2015 / Clemro Western Ltd.

P/1

# JAW CRUSHER COMPONENTS AND SPECIFICATIONS

- 1/ OUTER BEARING CAP
- 2/ JAW SHAFT
- 3/ PITMAN
- 4/ WEDGE BLOCK- 5/ ADJUSTMENT CYLINDER
- 6/ ADJUSTMENT SHIMS
- 7/ MANUAL OR MECHANIZED ADJUSTMENT  
OPTION
- 8/ JAW SPRING
- 9/ TENSION ROD
- 10/ TOGGLE BLOCK
- 11/ TOGGLE SEAT
- 12/ TOGGLE PLATE
- 13/ MOVABLE JAW DIE
- 14/ STATIONARY JAW DIE
- 15/ JAW BODY
- 16/ CHEEK PLATE
- 17/ STATIONARY JAW DIE EXTENSION
- 18/ MOVABLE JAW DIE EXTENSION
- 19/ FLYWHEEL
- 20/ OUTER BEARING CAP STUDS
- 21/ BALANCE WEIGHTS

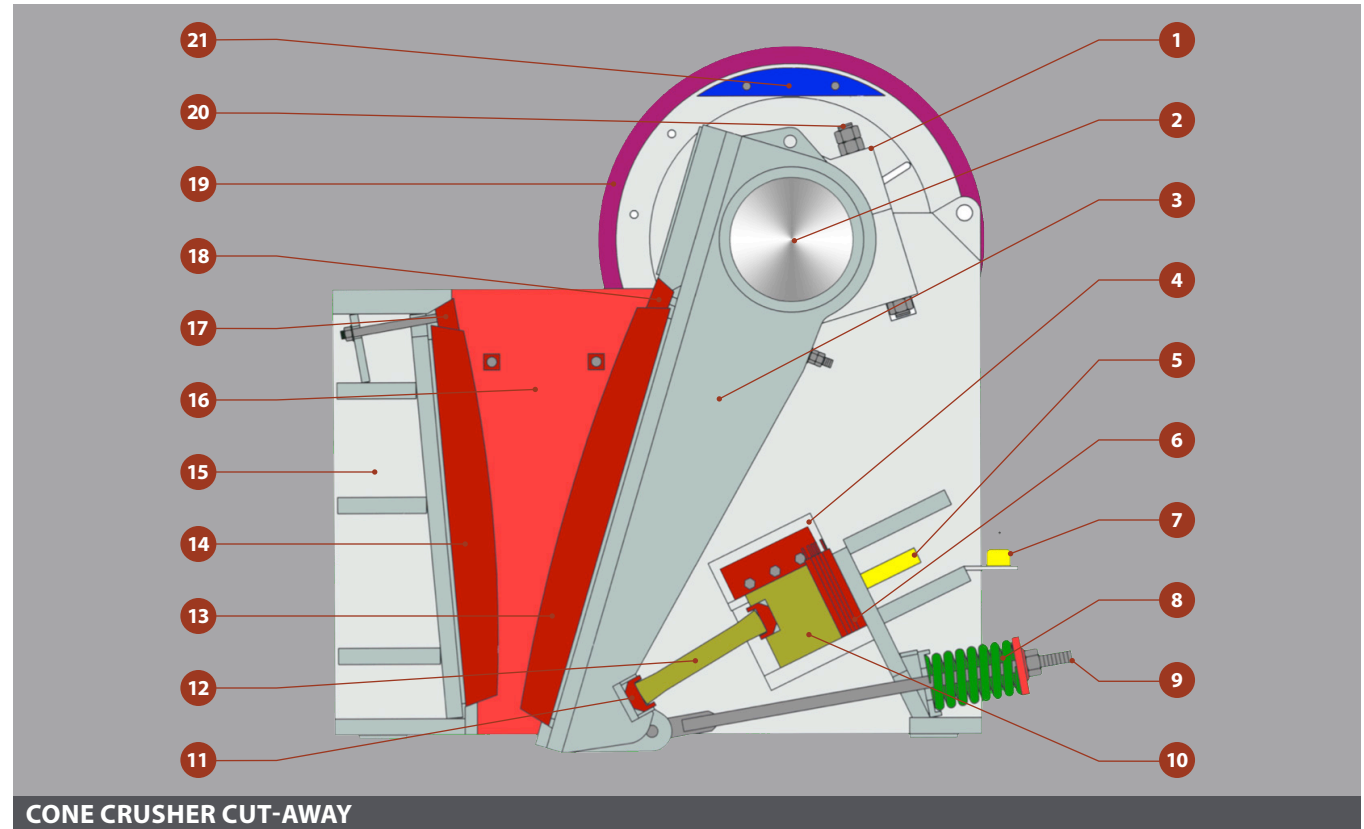

MODEL / SIZE	MAXIMUM FEED SIZE inch (mm)	MINIMUM JAW SETTING inch (mm)	MAXIMUM JAW SETTING inch (mm)	HORSEPOWER HP (kw)	WEIGHT lbs (kg)
18x54	18.0" (457)	1.5" (38)	8.0" (203)	100 (75)	35,500 (16,100)
20x54	20.0" (508)	2.0" (51)	8.0" (203)	150 (111)	41,000 (18,600)
22x36	22.0" (560)	2.0" (51)	7.0" (178)	75 (55)	22,000 (9,980)
24x42	24.0" (609)	3.0" (76)	10.0" (254)	100 (75)	38,000 (17,236)
24x48	24.0" (609)	2.0" (50)	8.0" (203)	150 (111)	42,000 (19,050)
25x36	25.0" (635)	2.5" (63)	8.0" (203)	75 (55)	24,000 (10,886)
30x48	30.0" (762)	3.0" (76)	10.0" (254)	150 (111)	58,000 (26,308)
32x42	32.0" (812)	3.0" (76)	12.0" (304)	150 (111)	56,000 (25,401)
32x54	32.0" (812)	4.0" (101)	16.0" (406)	250 (186)	85,000 (38,555)
36x48	36.0" (914)	3.5" (88)	16.0" (406)	200 (149)	86,000 (39,008)