



PORTABLE BELT FEEDER

- Wide Flange I-Beam Construction. ■
- Adjustable End Delivery Conveyor. ■
- Remote hydraulic grizzly dump. ■
- 18' feed conveyor. ■

CLEMRO

© 04.2015 / Clemro Western Ltd.

P/1

FEATURES

A/ FRAME AND HOPPER


- 15" @ 55 W.F. main frame
- Tandem axle running gear.
- 10.0 x 20 tube type tires
- Mud flaps and lights
- 14' or 15' x 8' feed hopper
- 3/8" self-riveting plate
- 3/8" AR plate, bolted
- Adjustable grizzly bars (optional)
- Wing walls to 8' - overall width
- Close sides included
- Remote hydraulic grizzly dump

B/ FEED CONVEYOR

- 18' feed conveyor c/w 6" impact rollers @ 9" centers, slides out for service.
- Impact shafts; 2-1/2" diameter, high strength alloy steel
- 16" diameter lagged head pulley, 2-15/16" diameter shaft
- 14" diameter self-cleaning tail pulley, 2-15/16" diameter shaft
- 1/4" face, 4-ply belt, vulcanized splice.
- 15-HP variable frequency drive
- 25-HP T.E.F.C. hydraulic vari-drive remote control.

C/ DELIVERY CONVEYOR

- Adjustable end delivery conveyor, hydraulic optional.
- Lattice construction c/w spiller board.
- Clemro 5" diameter troughing idlers.
- 3/16" face, 3-ply belt, vulcanized splice.
- 14" diameter lagged head pulley, 2-15/16" diameter shaft.
- 14" diameter self-cleaning tail pulley, 2-15/16" diameter shaft.
- 615 reducer c/w backstop.
- 20-HP, 1800 rpm, T.E.F.C. electric motor.

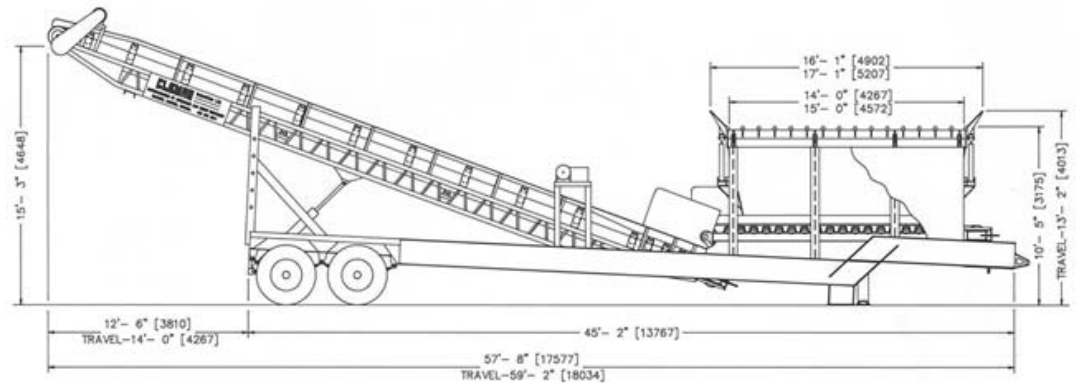

LOW PROFILE BELT FEEDERS